




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38		(11) International Publication Number: WO 99/45734
A1		(43) International Publication Date: 10 September 1999 (10.09.99)
(21) International Application Number: PCT/SE99/00279 (22) International Filing Date: 26 February 1999 (26.02.99) (30) Priority Data: 09/036,391 6 March 1998 (06.03.98) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: BHATIA, Rajit; 195 E. Round Grove Road #1527, Lewisville, TX 75067 (US). ERIKSSON, Erik, Henning; Tegskiftesgatan 141, S-583 34 Linköping (SE). HELLE- BERG, Anna; Fjällvägen 14B, S-191 46 Sollentuna (SE). OLSSON, Magnus; Hallonbergsplan 12 Vän 2, S-174 52 Sundbyberg (SE). (74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.

(54) Title: LOAD BALANCING OF ONGOING CALLS BETWEEN DIFFERENT BASE STATION CONTROLLERS

(57) Abstract

A method and system (50) for load balancing used in a mobile telecommunications network (100). The load balancing system (50) includes a mobile services switching center (130) and a first base station controller (150) coupled to the mobile services switching center (130) for managing a first plurality of cells (110a-110c). The load balancing system (50) further includes a second base station controller (155) coupled to the mobile services switching center (130) for managing a second plurality of cells (110e-110h), where one cell (110b) of the first plurality (110a-110c) of cells is adjacent to one cell (110f) of the second plurality of cells (110e-110h). The second base station controller (155) includes a processor (230) responsive to receiving a first load indication message (238) from the first base station controller (150) in order to determine whether to handover at least one ongoing call from the one cell (110f) of the second base station controller (155) to the one cell (110b) of the first base station controller (150).

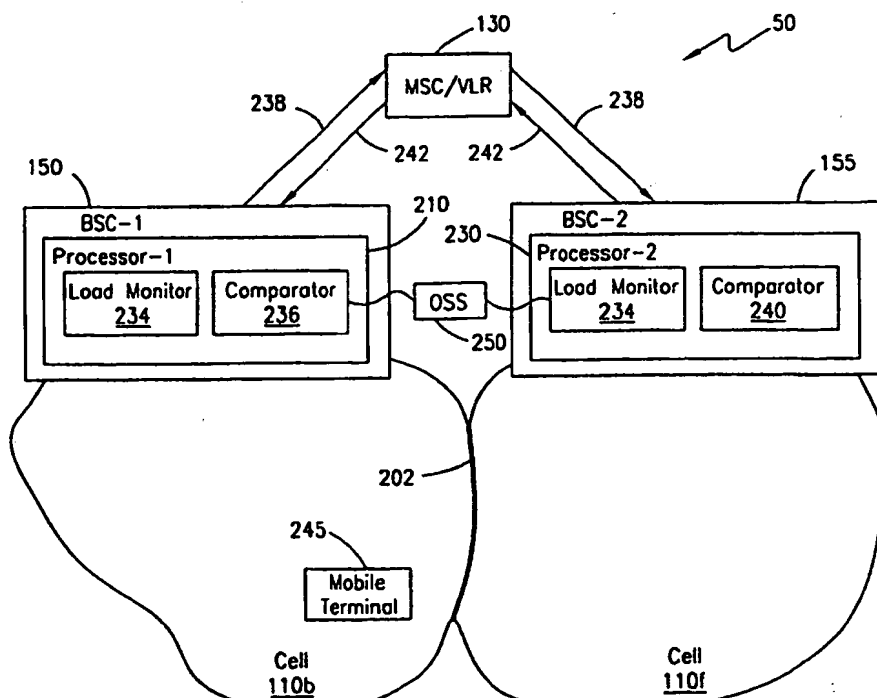

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 99/00279

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4670899	A	02-06-1987	CA 1235459 A	19-04-1988
WO 9535639	A	28-12-1995	AU 2757395 A	15-01-1996
			CA 2192934 A	28-12-1995
			CN 1152989 A	25-06-1997
			EP 0765584 A	02-04-1997
			FI 965012 A	07-02-1997
			JP 10501940 T	17-02-1998
			US 5697054 A	09-12-1997
US 4669107	A	26-05-1987	SE 458734 B	24-04-1989
			AU 585596 B	22-06-1989
			AU 5608286 A	15-10-1987
			GB 2189667 A,B	28-10-1987
			SE 8405462 A	01-05-1986

INTERNATIONAL SEARCH REPORT

Interr.	ial Application No
---------	--------------------

PCT/SE 99/00279

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 4 669 107 A (ERIKSSON-LENNARTSSON ULF L K) 26 May 1987</p> <p>see the whole document</p>	<p>5,6,9, 11,20, 25,27</p>

LOAD BALACING OF ONGOING CALLS BETWEEN DIFFERENT BASE STATION CONTROLLERS.

CROSS REFERENCE TO RELATED APPLICATIONS

This application is related to two U.S. Applications filed on March 6, 1998 in the name of Pontus Wallentin entitled "Telecommunications Inter-Exchange Measurement Transfer" (attorney's Docket No. 2380-44) and "Telecommunications Inter-Exchange Congestion Control" (attorney's Docket No. 2380-45); both of which are hereby incorporated by reference herein.

BACKGROUND OF THE INVENTION

Technical Field of the Invention

The present invention generally relates to a mobile telecommunications network and, in particular, to a system and method used in a mobile telecommunications network for load balancing ongoing calls between different base station controllers.

Description of Related Art

A mobile telecommunications network having an architecture according to the Global System for Mobile Communications (GSM) specification includes a multitude of cells. The cells effectively divide an arbitrary geographic area into a plurality of contiguous radio coverage areas, each of which is served by a base transceiver station (BTS). The BTS serves each cell by utilizing a limited number of traffic channels that are controlled by a base station controller (BSC). The BSC is generally used to supervise and control a group of the BTSs.

The BSC may have a feature known as "Cell Load Sharing" to increase the capacity and operating performance of the network by effectively balancing the ongoing call loads between the cells that are adjacent to one another. For example, at any time a particular cell may have a high ongoing call load, while adjacent cells have

-2-

low ongoing call loads, thus triggering the "Cell Load Sharing" feature of the base station controller to balance the various call loads between the different cells. The BSC balances the various call loads by transferring some of the ongoing calls from the cell having the high ongoing call load to the adjacent cell(s) having the low ongoing call load. Of course, the ongoing call load for any cell is constantly changing due mainly to origination of new calls and handovers of calls from traveling mobile terminals.

However, the "Cell Load Sharing" feature currently used will operate only with respect to the cells or base transceiver stations that are controlled by one base station controller. Thus, if a cell associated with a different base station controller is adjacent to the cell controlled by another base station controller, then no balancing of the ongoing calls can be completed, because the required information is not communicated between the different base station controllers.

Accordingly, there is a need for a method and system used in a mobile telecommunications network for load balancing ongoing calls between adjacent cells controlled by different base station controllers. There is also a need for a system and method for transmitting load indication messages between different base station controllers. These and other needs are satisfied by the system and method of the present invention.

SUMMARY OF THE INVENTION

The present invention is a method and system for load balancing used in a mobile telecommunications network. The load balancing system includes a mobile services switching center and a first base station controller coupled to the mobile services switching center for managing a first plurality of cells. The load balancing system further includes a second base station controller coupled to the mobile services switching center for managing a second plurality of cells, where one cell of the first plurality of cells is adjacent to one cell of the second plurality of cells. The second base station controller includes a processor responsive to receiving a first load indication message from the first base station controller in order to determine whether

to handover at least one ongoing call from the one cell of the second base station controller to the one cell of the first base station controller.

In accordance with the present invention, a system and method are provided for balancing an ongoing call load across a boundary between adjacent cells that are controlled by different base station controllers.

Also in accordance with the present invention, a system and method are provided that have a base station controller generating a load indication message whenever the number of available traffic channels within a cell changes so as to exceed or fall below a predetermined threshold.

Further in accordance with the present invention, a method and system are provided for utilizing a load indication message in a different and more advantageous manner than was intended by the GSM specification.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and apparatus of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

FIGURE 1 is a block diagram of a mobile telecommunications network incorporating a load balancing system, in accordance with the present invention;

FIGURE 2 is a block diagram illustrating in greater detail the load balancing system shown in FIGURE 1; and

FIGURE 3 is a simplified flow diagram of an operation of the load balancing system shown in FIGURE 1.

DETAILED DESCRIPTION OF THE DRAWINGS

Referring to the Drawings, wherein like numerals represent like parts throughout FIGURES 1-3, there is disclosed an exemplary load balancing system 50, which can be used to implement a preferred embodiment of the present invention.

Although a mobile telecommunications network 100 embodying the load balancing system 50 of the present invention will be discussed based on the Global System for Mobile Communications (GSM) specification, those skilled in the art will

appreciate that the GSM specification is only one of many specifications and standards that may utilize the principles of the present invention. Accordingly, the load balancing system 50 described should not be construed in such a limiting manner.

Referring to FIGURE 1, there is illustrated a block diagram of the mobile telecommunications network 100 incorporating the exemplary load balancing system 50. Excluding the load balancing system 50, the general architecture of the mobile telecommunication network 100 is based substantially on the GSM specification.

The mobile telecommunications network 100 includes a plurality of cells 110a-110h that effectively divide an arbitrary geographic area into a plurality of contiguous radio coverage areas. A single base transceiver station (BTS) 125a-125h consisting of transmitter and receiver antenna(s) (not shown) is positioned within each cell 110a-110h.

Different groups of neighboring cells (e.g., cells 110a-110c) are then associated with a particular base station controller (e.g., BSC-1 150). A number of BSCs (e.g., BSC-1 150 and BSC-2 155) may, in turn, be associated with a mobile services switching center/visitor location register (e.g., MSC/VLR 130). As an illustration, the BSC-1 150 provides mobile service for cells 110a-110c, while the BSC-2 155 provides mobile service for cells 110d-110h. The BSC-1 150 and BSC-2 155 are in turn coupled to the 130, which generally functions as an interface between the mobile telecommunications network 100 and, for example, a public switched telephone network (PSTN) (not shown). The load balancing system 50 preferably includes the BSCs (e.g., BSC-150 and BSC-2 155) and the MSC/VLR 130, which are discussed in greater detail with reference to FIGURES 2-3.

Referring to FIGURE 2, there is illustrated a block diagram of the exemplary load balancing system 50. The load balancing system 50 generally includes the MSC/VLR 130 coupled to the BSC-1 150 and the BSC-2 155 for balancing an ongoing call load in opposite directions across a boundary 202 between the adjacent cells 110b and 110f. The adjacent cells 110b and 110f are controlled by the BSC-1 150 and the BSC-2 155, respectively. For clarity, the description of the load balancing system 50 will include only two BSCs (e.g., BSC-1 150 and BSC-2 155) each having

adjacent cells (e.g., cells 110b and 110f); however, the system may include any number of BSCs.

The BSC-1 150 includes a processor-1 210 for determining whether or not to handover at least one ongoing call from the cell 110b to the cell 110f, in view of the number of ongoing calls within the two cells. Likewise, the BSC-2 155 includes a processor-2 230 responsible for determining whether or not to handover at least one ongoing call from the cell 110f to the cell 110b. The BSC-1 150 and BSC-2 155 can further include conventional components, such as a regional processor, group switch and signaling terminal central, etc.

The reason for ordering a handover associated with load balancing is not to be confused with the traditional handover associated with a moving mobile terminal 245. For example, the traditional handover would be completed when the mobile terminal 245 travels from the cell 110b to the cell 110h, and the ongoing call is transferred to the cell 110h as the mobile terminal enters the cell 110h. Notably, the load balancing handover of the present invention may be completed for load balancing purposes to transfer the ongoing call from the cell 110b to the cell 110h even though the mobile terminal 245 remains within the cell 110b.

The processors 210 and 230 each include a load monitor 234 for continuously or periodically updating the number of traffic channels that are currently active and can not accept a new call or an ongoing call via a traditional handover procedure. The load monitor 234 may also periodically or continuously calculate a percentage of the active traffic channels with respect to a total number of traffic channels assigned to anyone of the cells. The number of active traffic channels or the percentage described above may be referred to as a resource utilization number (RUN).

A comparator-1 236 incorporated within the processor-1 210 compares a predetermined threshold (described below) to the RUN associated with the cell 110b to determine if a load indication message-1 238 must be generated and transmitted via the MSC/VLR 130 to the BSC-2 155. The load indication message-1 238 is generated whenever the RUN (e.g., the number of active traffic channels) within the cell 110b changes so as to exceed or fall below a predetermined threshold. It should be noted that the load indication message-1 238 of the present invention is thus used in a

different, more advantageous manner than was originally intended by the GSM standard.

For example, the load indication message-1 238 will not be generated if a prior RUN was below/above the predetermined threshold and the current resource utilization number is below/above the predetermined threshold, respectively. However, the load indication message-1 238 will be generated and transmitted to the BSC-2 155 whenever the prior RUN was below/above the predetermined threshold and the current RUN is above/below (e.g., opposite sides) the predetermined threshold, respectively.

Alternatively, the load indication message-1 238 may be periodically generated and transmitted to the BSC-2 155 during predetermined intervals of time without comparing the RUN associated with the cell 110b to the predetermined threshold. In such a case, the load indication message-1 238 would be comparable to the resource utilization number.

A comparator-2 240 is incorporated within the processor-2 230 to compare a predetermined threshold and the RUN associated with the cell 110h to determine if a load indication message-2 242 will be generated and transmitted via the MSC/VLR 130 to the BSC-1 150. The load indication message-2 242 is generated whenever the RUN within the cell 110h changes so as to exceed or fall below the predetermined threshold. As mentioned above, the load indication message-2 242 may be periodically generated and transmitted to the BSC-1 150 during predetermined intervals of time without comparing the RUN of the cell 110h to the predetermined threshold. Also, some of the load indication information could be included in messages transmitted using the traditional handover procedures.

Upon receiving the load indication message-2 242, the BSC-1 150 (and more specifically the processor-1 210) will determine whether to attempt transfer of at least one of the ongoing calls within the cell 110b to the cell 110h. The processor-1 210 will transfer or handover at least one of the ongoing calls when the RUN of the cell 110b is greater than a predetermined threshold and the BSC-2 155 can accept the ongoing call(s). The BSC-2 155 can accept the ongoing call(s) from the BSC-1 150

when the RUN of the cell 110f is below the predetermined threshold, otherwise, the BSC-2 may not accept the at least one ongoing call.

Similarly, the BSC-2 155 and the processor-2 230 upon receiving the load indication message-1 238 will determine whether to attempt a transfer of at least one of the ongoing calls within the cell 110h to the cell 110b associated with the BSC-1 150. The processor-2 230 will transfer or handover at least one of the ongoing calls when the RUN the cell 110h is greater than a predetermined threshold and the BSC-1 150 can accept the ongoing call(s). The BSC-1 150 can accept at least one of the ongoing calls from the BSC-2 155 when the RUN of the cell 110b is below the predetermined threshold; otherwise, the BSC-1 will not accept the ongoing call(s) from cell 110h.

The predetermined threshold is generally the same level for each of the BSCs 150 and 155, and may be submitted to the processors 210 and 230 via an operation and support system (OSS) 250. The OSS 250 may also change the levels of the predetermined threshold so that there is a different level for each cell 110b and 110f. Also, the predetermined threshold level may include an upper threshold and lower threshold to help assure that the RUN is stable above or below the respective threshold before generating the load indication message.

Referring to FIGURE 3, there is illustrated a simplified flow diagram of a method of operation for the exemplary load balancing system 50. As discussed earlier, the operation of the load balancing system 50 may be performed within the mobile telecommunications network 100 based on the GSM specification. However, other specifications or standards may be used such as, for example, the Advanced Mobile Phone System (AMPS), the Digital Advanced Mobile Phone System (D-AMPS) and the Personal Digital Cellular (PDC) System.

Beginning at step 302 of the preferred method, the OSS 250 establishes the predetermined threshold and distributes the predetermined threshold to the BSC-1 150 and the BSC-2 155 (FIGURE 2). The predetermined threshold is generally the same level within each of the BSCs 150 and 155.

At step 304, the load indication messages (e.g., load indication message-1 238) are generated and updated within the respective BSCs (e.g., BSC-1 150) whenever the

RUN within the corresponding cell (e.g., cell 110b) changes so as to exceed or fall below the predetermined threshold. Alternatively, the load indication messages (e.g., load indication message-1 238) may be periodically updated and generated during predetermined intervals of time, without comparing the RUN associated with the cells (e.g., cell 100b) to the predetermined threshold.

At step 306, each of the generated load indication messages (e.g., load indication message-1 238) are transmitted to the other BSCs (e.g., BSC-2 155). Then at step 308, each processor (e.g., processor-2 230) compares the received load indication messages (e.g., load indication message-1 238) to the predetermined threshold.

At step 310, a determination is made by each processor (e.g., processor-2 230) upon receiving the load indication message (e.g., load indication message-1 238) about whether to attempt a handover of at least one of the ongoing calls from one BSC (e.g., BSC-2 155) to the other BSC (e.g., BSC-1 150). The processor (e.g., processor-2 230), at step 312, will handover at least one of the ongoing calls when the RUN of the cell (e.g., cell 110h) is greater than a predetermined threshold, and the other BSC (e.g., BSC-1 150) can accept that ongoing call. Otherwise at step 314, the ongoing calls within the particular cell (e.g., cell 110h) will remain within that cell.

From the foregoing, it can be readily appreciated by those skilled in the art that the present invention provides a load balancing system and method for use in a mobile telecommunications network for distributing ongoing calls between adjacent cells controlled by different base station controllers. Also, the load balancing system as disclosed may be used to transmit load indication messages between different base station controllers.

Although one embodiment of the method and apparatus of the present invention has been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

WHAT IS CLAIMED IS:

1. A load balancing system used in a mobile telecommunications network comprising:

a mobile services switching center;

a first base station controller coupled to the mobile services switching center for managing a first plurality of cells;

a second base station controller coupled to the mobile services switching center for managing a second plurality of cells, where one cell of the first plurality of cells is adjacent to one cell of the second plurality of cells, said second base station controller including:

a processor responsive to receiving a first load indication message from the first base station controller for determining whether to handover at least one ongoing call from the one cell of the second base station controller to the one cell of the first base station controller.

2. The load balancing system of Claim 1, wherein said first base station controller including a processor responsive to receiving a second load indication message from the second base station controller for determining whether to handover at least one ongoing call from the one cell of the first base station controller to the one cell of the second base station controller.

3. The load balancing system of Claim 2, wherein said processor of the first base station controller includes means for generating the first load indication message whenever a number of active traffic channels within the one cell of the first base station controller changes such as to exceed or fall below a predetermined threshold.

4. The load balancing system of Claim 1, wherein said processor of the second base station controller includes means for generating the second load indication message whenever a number of active traffic channels within the one cell of the

second base station controller changes such as to exceed or fall below a predetermined threshold.

5. The load balancing system of Claim 2, wherein said processor of the first base station controller includes means for periodically generating the first load indication message.

6. The load balancing system of Claim 1, wherein said processor of the second base station controller includes means for periodically generating the second load indicating message.

7. The load balancing system of Claim 2, wherein said processor of the first base station controller further includes means for transferring the at least one ongoing call to the one cell of the second base station controller when the number of active traffic channels of the one cell associated with the first base station controller is greater than a predetermined threshold and the second base station controller can accept the at least one ongoing call.

8. The load balancing system of Claim 1, wherein said processor of the second base station controller further includes means for transferring the at least one ongoing call to the one cell of the first base station controller when the number of active traffic channels of the one cell associated with the second base station controller is greater than a predetermined threshold and the first base station controller can accept the at least one ongoing call.

9. The load balancing system of Claim 2, wherein the processor of the first base station controller further includes a load monitor for updating the number of active traffic channels.

-11-

10. The load balancing system of Claim 9, wherein the processor of the first base station controller further includes a comparator for comparing the updated number of active traffic channels to the predetermined threshold.

11. The load balancing system of Claim 1, wherein the processor of the second base station controller further includes a load monitor for updating the number of active traffic channels.

12. The load balancing system of Claim 11, wherein the processor of the second base station controller further includes a comparator for comparing the updated number of active traffic channels to the predetermined threshold.

13. A mobile telecommunications network comprising:

a switching center;

a first base station having a first cell, said first base station coupled to the switching center;

a second base station having a second cell adjacent to the first cell of the first base station, said second base station coupled to the switching center including:

a second controller for transmitting a message to the first base station whenever a resource utilization number of the second cell changes as to exceed or fall below a predetermined threshold, where the second base station can accept at least one ongoing call from the first base station when the resource utilization number of the second base station is less than the predetermined threshold.

14. The mobile telecommunications network of Claim 13, wherein said first base station including a first controller for transmitting a message to the second base station whenever a resource utilization number of the first cell changes as to exceed or fall below the predetermined threshold, where the first base station can accept at least one ongoing call from the second base station when the resource utilization number of the first base station is less than the predetermined threshold.

15. The mobile telecommunications network of Claim 14, further comprising an operations and support system for submitting the predetermined threshold to the first controller and the second controller.

16. The mobile telecommunications network of Claim 14, wherein said first controller includes means responsive to the transmitted message from the second base station for transferring the at least one ongoing call of the first cell to the second cell of the second base station when the resource utilization number of the first cell is greater than a predetermined threshold and the second base station can accept the at least one ongoing call from the first base station.

17. The mobile telecommunications network of Claim 13, wherein said second controller includes means responsive to the transmitted message from the first base station for transferring the at least one ongoing call of the second cell to the first cell of the first base station when the resource utilization number of the second cell is greater than predetermined threshold and the first base station can accept the at least one ongoing call from the second base station.

18. The mobile telecommunications network of Claim 14, wherein the resource utilization number includes a number of active traffic channels.

19. The mobile telecommunications network of Claim 14, wherein the resource utilization number includes a number of active traffic channels divided by a total number of traffic channels.

20. The mobile telecommunications network of Claim 14, wherein the first and second controllers each include a load monitor for updating the resource utilization number of the first cell and the second cell, respectively.

-13-

21. The mobile telecommunications network of Claim 20, wherein the first and second controllers each include a comparator for comparing the respective updated resource utilization number to the predetermined threshold.

22. A method used in a mobile telecommunications network for sharing loads between a first base station controller having a first cell and a second base station controller having a second cell adjacent to the first cell, said method comprising the steps of:

establishing and distributing a predetermined threshold to the first and second base station controllers;

generating a first load indication message within the first base station controller;

transmitting the first load indication message to the second base station controller; and

comparing the transmitted first load indication message to the distributed predetermined threshold to determine whether to handover at least one ongoing call from the second cell of the second base station controller to the first cell of the first base station controller.

23. The method of Claim 22, further comprising the steps of:

generating a second load indication message within the second base station controller;

transmitting the second load indication message to the first base station controller; and

comparing the transmitted second load indication message to the distributed predetermined threshold to determine whether to handover at least one ongoing call from the first cell of the first base station controller to the second cell of the second base station controller.

24. The method of Claim 22, wherein the step of generating a first load indication message includes updating the first load indication message whenever a

number of active traffic channels within the first cell changes such as to exceed or fall below the predetermined threshold.

25. The method of Claim 22, wherein the step of generating a first load indication message includes updating the first load indication message on a periodic basis.

26. The method of Claim 23, wherein the step of generating a second load indication message includes updating the second load indication message whenever a number of active traffic channels within the second cell changes such as to exceed or fall below the predetermined threshold.

27. The method of Claim 23, wherein the step of generating a second indication message includes periodically updating the second load indication message.

28. The method of Claim 22, wherein the step of comparing the transmitted first load indication message further includes transferring the at least one ongoing call to the first cell when the number of active traffic channels of the second cell associated with the second base station controller is greater than the predetermined threshold and the first base station controller can accept the at least one ongoing call.

29. The method of Claim 23, wherein the step of comparing the transmitted second load indication message further includes transferring the at least one ongoing call to the second cell when the number of active traffic channels of the first cell associated with the first base station controller is greater than the predetermined threshold and the second base station controller can accept the at least one ongoing call.

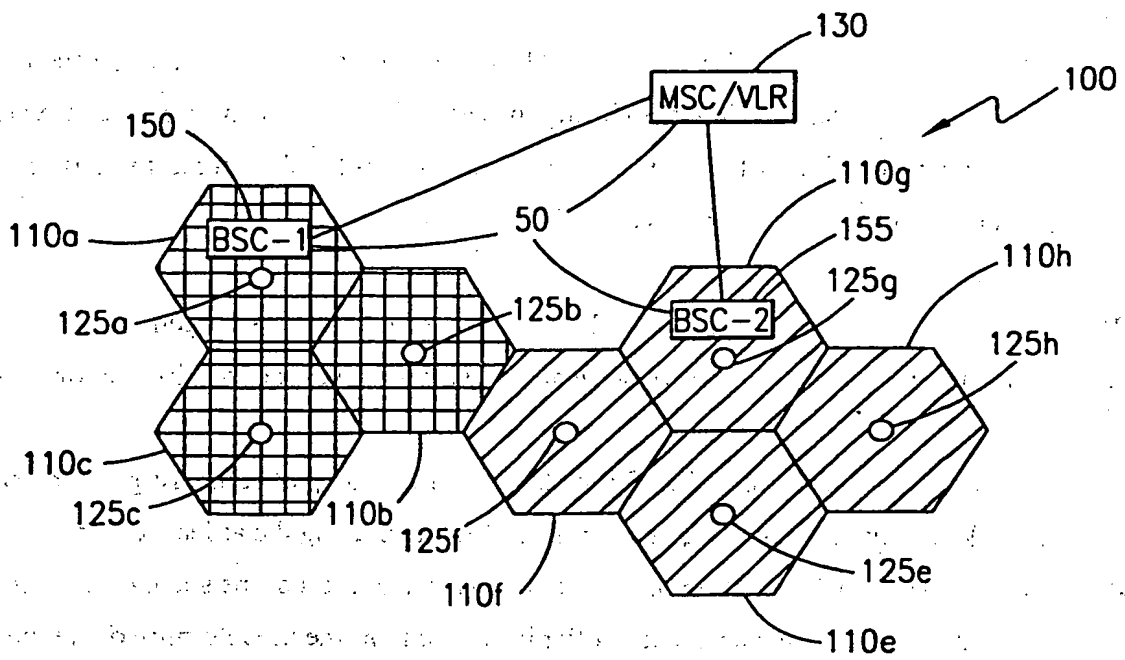


FIG. 1

FIG. 1 is a block diagram of a mobile communication network architecture. The network includes a Mobile Switching Center/Virtual Location Register (MSC/VLR) 130, which is connected to two Base Station Controllers (BSC-1 and BSC-2) via a network 50. BSC-1 is connected to three hexagonal cells (110a, 110b, 110c), and BSC-2 is connected to four hexagonal cells (110d, 110e, 110f, 110g). Each hexagonal cell is further divided into sub-cells (125a, 125b, 125c, 125d, 125e, 125f, 125g, 125h). A reference numeral 100 points to the entire system. A label 150 points to BSC-1, and a label 155 points to BSC-2.

2/3

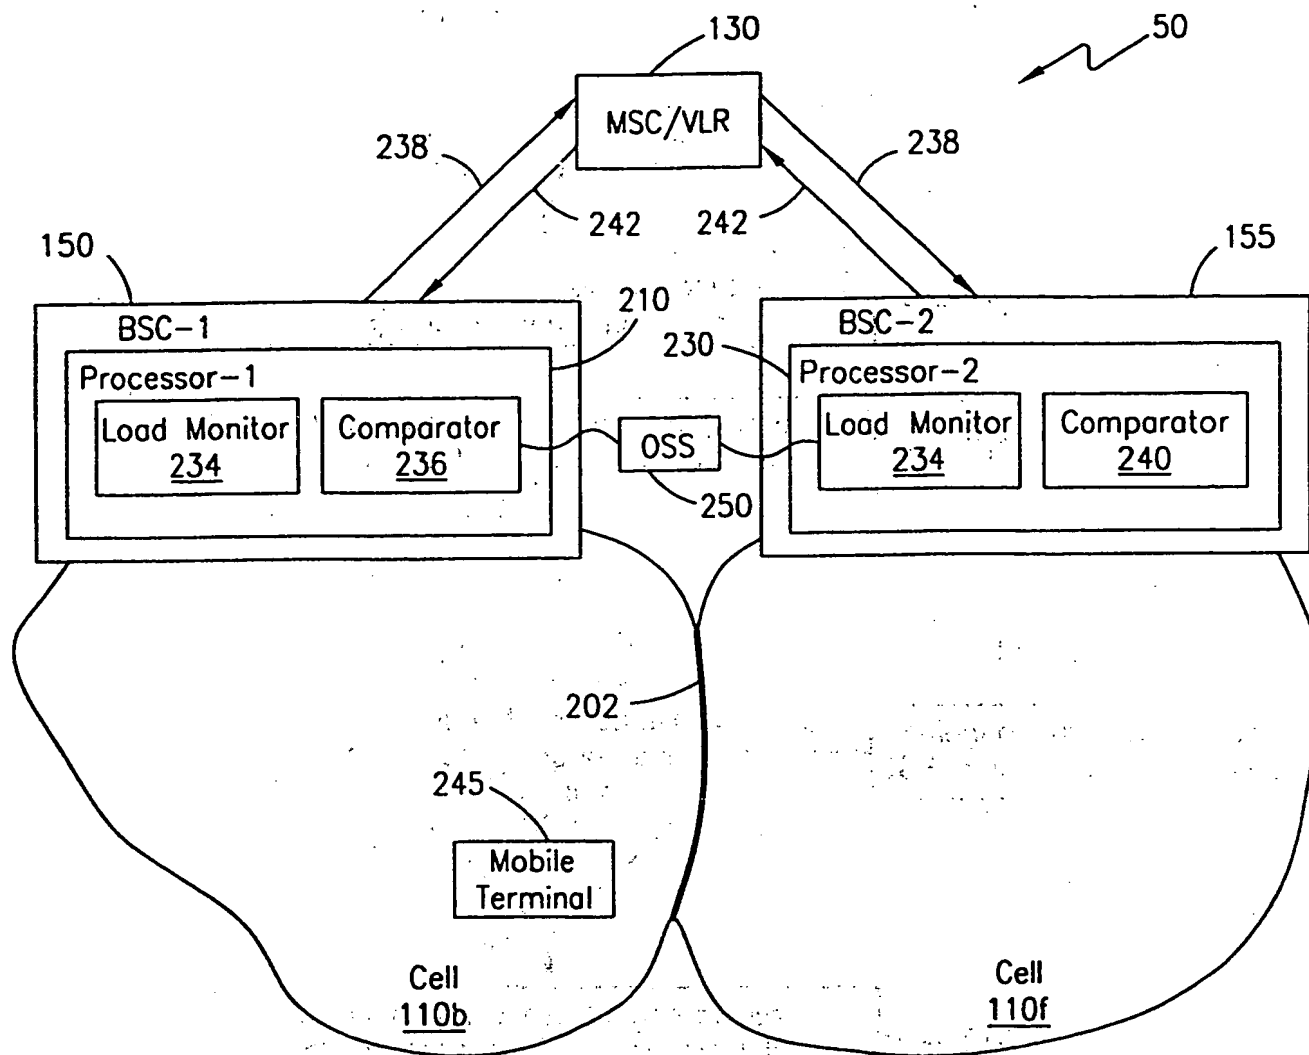


FIG. 2

3/3

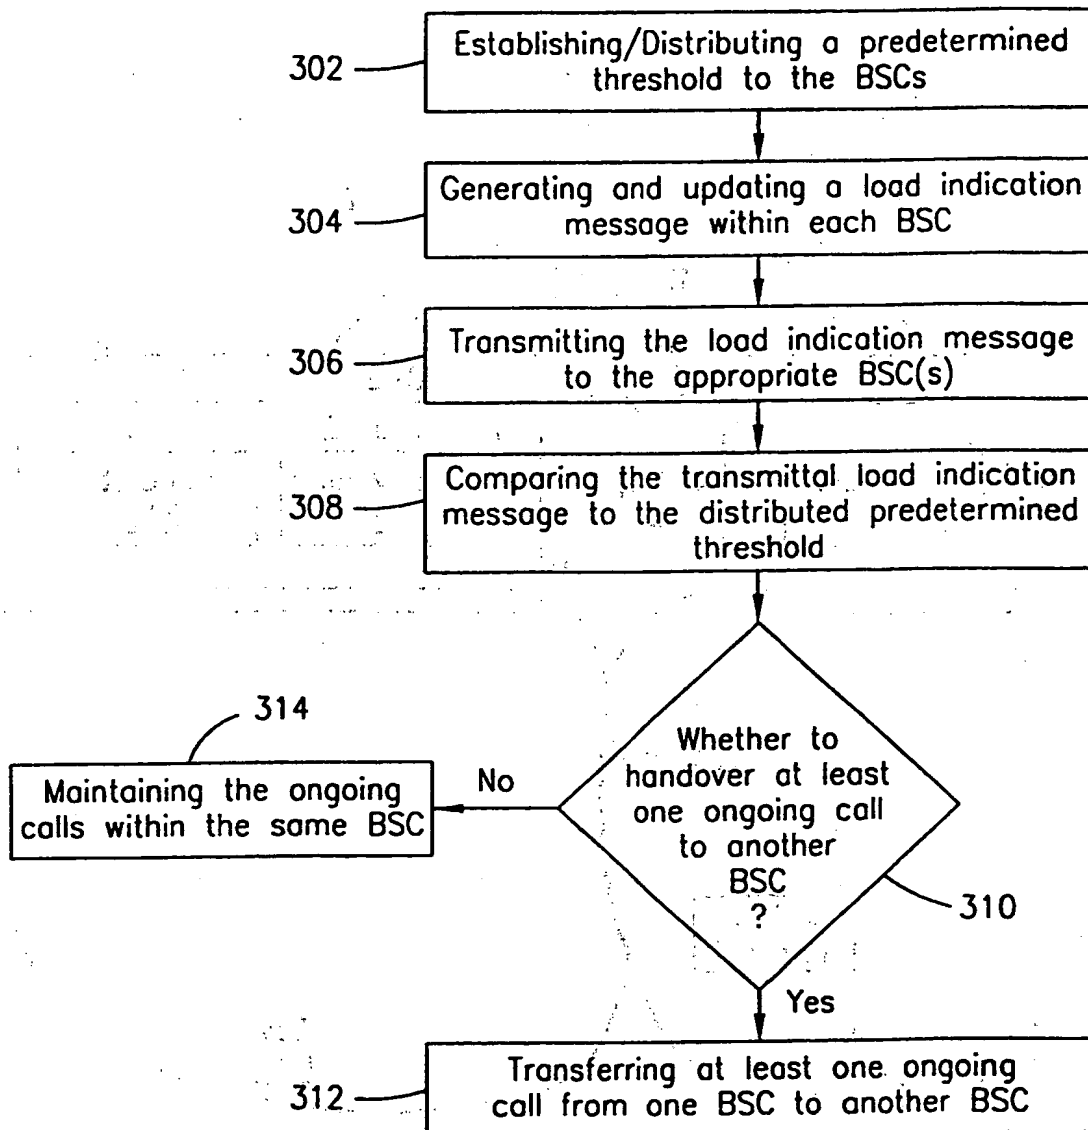


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 99/00279

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 670 899 A (BRODY GEORGE C ET AL) 2 June 1987 see column 6, line 59 - column 7, line 49 see column 9, line 38 - line 50 see column 11, line 14 - column 12, line 40 see column 14, line 4 - line 64 see column 16, line 33 - column 17, line 17 see abstract; figures 4,5	1-29
Y	WO 95 35639 A (ANDERSSON HANS ERIK ;ERICSSON TELEFON AB L M (SE)) 28 December 1995 see page 1, line 21 - page 2, line 12 see page 4, line 5 - line 26 see page 5, line 15 - page 7, line 17 see abstract; figures 1-3	1-29

-/--

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

26 May 1999

Date of mailing of the international search report

07/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Coppieters, S

INTERNATIONAL SEARCH REPORT

Interr. Application No

PCT/SE 99/00279

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 4 669 107 A (ERIKSSON-LENNARTSSON ULF L K) 26 May 1987</p> <p>see the whole document</p> <p>-----</p>	<p>5, 6, 9, 11, 20, 25, 27</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 99/00279

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4670899	A	02-06-1987	CA 1235459 A	19-04-1988
WO 9535639	A	28-12-1995	AU 2757395 A	15-01-1996
			CA 2192934 A	28-12-1995
			CN 1152989 A	25-06-1997
			EP 0765584 A	02-04-1997
			FI 965012 A	07-02-1997
			JP 10501940 T	17-02-1998
			US 5697054 A	09-12-1997
US 4669107	A	26-05-1987	SE 458734 B	24-04-1989
			AU 585596 B	22-06-1989
			AU 5608286 A	15-10-1987
			GB 2189667 A,B	28-10-1987
			SE 8405462 A	01-05-1986